


Product Overview

- Individually tested for certified performance
- Available in a variety of metal cell sides and efficiencies
- High temperature models available up to 260°C
- High capacity option for higher airflow
- Available in gasket seal

Specification

EN1822	H13, 14
Filter Depth (mm)	149, 292
Media Type	Fibreglass
Frame Material	Stainless Steel
Separator Style	Aluminium
Gasket Material	Red Silicone Gasket
Sealant	White, Red Silicone
Faceguard	Optional
Special Size Available	Yes
Antimicrobial Available	No
Header Type	None Header
Recommended Final Resistance	750 Pa
Max Operating Temperature	180°C, 260°C

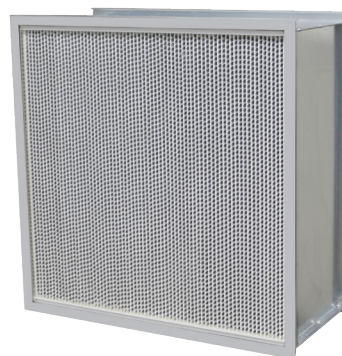

Product Information

Part Number	Actual Size mm (H x W x D)	Rated Airflow (CMH)	Rated Initial Resistance (Pa)	Sealant Type
AstroCel® I HT-400 (H13)				
M656-263-004	610 x 305 x 149	425	250	WHITE SILICONE
M656-263-005	610 x 610 x 149	850		
M656-265-004	610 x 305 x 292	850		
M656-265-005	610 x 610 x 292	1,700		
AstroCel® I HT-400 (H14)				
M653-263-004	610 x 305 x 149	425	250	WHITE SILICONE
M653-263-005	610 x 610 x 149	850		
M653-265-004	610 x 305 x 292	850		
M653-265-005	610 x 610 x 292	1,700		
AstroCel® I HT-500 (H13)				
M656-267-004	610 x 305 x 149	425	250	RED SILICONE
M656-267-005	610 x 610 x 149	850		
M656-268-004	610 x 305 x 292	850		
M656-268-005	610 x 610 x 292	1,700		
AstroCel® I HT-500 (H14)				
M653-267-004	610 x 305 x 149	425	250	RED SILICONE
M653-267-005	610 x 610 x 149	850		
M653-268-004	610 x 305 x 292	850		
M653-268-005	610 x 610 x 292	1,700		