



# DriPak III

## Product Overview


- Micro-fine glass fiber media
- Low resistance and high dust holding capacity
- Engineered for performance reliability
- Stable and reliable filtration performance
- Ideal choice for pre-filtration and end-of-line filtration



## Specification

EN779	M5 - F8
ASHRAE 52.2	MERV 10, 11, 13, 14
ISO 16890	ePM10 60%, ePM2.5 50% ePM1 65%, ePM1 80%
Filter Depth (mm)	533, 610
Media Type	Fibreglass
Frame Material	Galvanised Steel
Special Size Available	Yes
Anitmicrobial Available	Optional
Single Header	Yes
Recommended Final Resistance	450 Pa
Max Operating Temperature	66°C

## Initial Resistance vs. Airflow

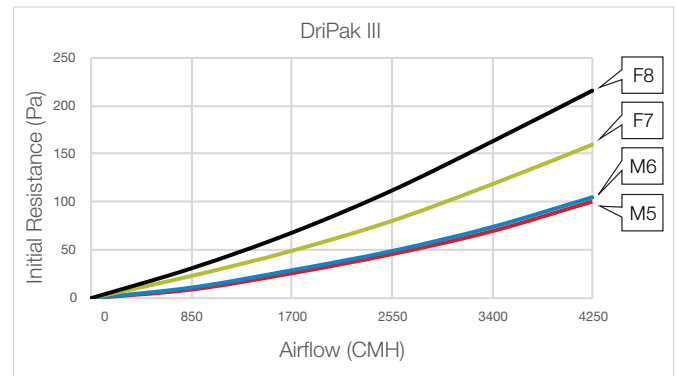

## Product Information

Part Number	Nominal Size Inches (W x H x D)	Actual Size mm (W x H x D)	Number of Pocket	Rated Airflow (CMH)	Rated Initial Resistance (Pa)
<b>M5 / MERV 10 / ePM10 60%</b>					
M260-204-421	12 x 24 x 21	289 x 594 x 533	4	1,700	70
M260-306-421	20 x 24 x 21	492 x 594 x 533	6	2,800	
M260-108-421	24 x 24 x 21	594 x 594 x 533	8	3,400	
<b>M6 / MERV 11 / ePM2.5 50%</b>					
M260-204-621	12 x 24 x 21	289 x 594 x 533	4	1,700	74
M260-306-621	20 x 24 x 21	492 x 594 x 533	6	2,800	
M260-108-621	24 x 24 x 21	594 x 594 x 533	8	3,400	
<b>F7 / MERV 13 / ePM1 65%</b>					
M260-204-821	12 x 24 x 21	289 x 594 x 533	4	1,700	118
M260-306-821	20 x 24 x 21	492 x 594 x 533	6	2,800	
M260-108-821	24 x 24 x 21	594 x 594 x 533	8	3,400	
<b>F8 / MERV 14 / ePM1 80%</b>					
M260-204-921	12 x 24 x 21	289 x 594 x 533	4	1,700	163
M260-306-921	20 x 24 x 21	492 x 594 x 533	6	2,800	
M260-108-921	24 x 24 x 21	594 x 594 x 533	8	3,400	