




DuraGT

Product Overview

- Protect engines with sustained particulate collection
- Media packs potted on all sides for a leakfree seal
- Corrosion-proof construction
- Protection screens for increased filter media stability and high burst pressure
- Quick and easy maintenance

Specification

EN 779	M6 - F9
ASHRAE 52.2	MERV 11-15
Filter Depth (mm)	292, 440
Media Type	Fibreglass
Frame Material	Plastic
Protection Screen	Plastic
Sealant	Polyurethane
Gasket	PU
Burst Strength	> 3,000 Pa
Recommended Final Resistance	450 Pa
Max Operating Temperature	70°C
Humidity Range	0 to 100% Relative Humidity

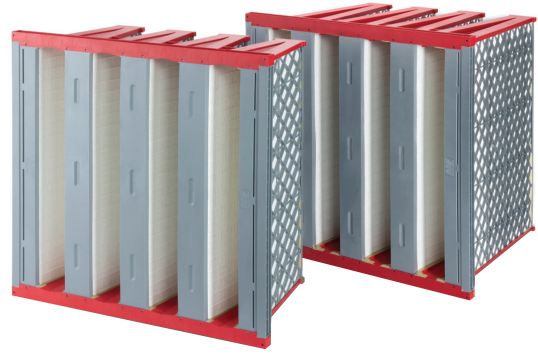

Product Information

Model	Nominal Size Inches (W x H x D)	Actual Size mm (W x H x D)	Rated Airflow (CMH)	Rated Initial Resistance (Pa)
M6 / MERV 11				
DuraGT V300	24 x 24 x 12	592 x 592 x 292	4,250	101
F7 / MERV 13				
DuraGT V300	24 x 24 x 12	592 x 592 x 292	4,250	113
F8 / MERV 14				
DuraGT V300	24 x 24 x 12	592 x 592 x 292	4,250	116
DuraGT V450	24 x 24 x 17	592 x 592 x 440		110
F9 / MERV 15				
DuraGT V300	24 x 24 x 12	592 x 592 x 292	4,250	143