



Product Overview

AmerSorb P is highly effective at eliminating low levels of VOCs, odors, and contaminants from indoor air, providing an ideal solution for facilities seeking relief from irritating odours caused by cigarette smoke, food preparation, and vehicle exhaust.



Key Features



IAQ Filter

Effectively removes gases and odours



Durable Construction

Metal-free design ensures safer handling and long-lasting performance



Dust-Free Operation

No carbon dusting




Easy Disposal

Suitable for incineration or shredding

Specification

ASHRAE 52.2	MERV 6
Filter Depth (mm)	22, 44, 95
Media Type	Carbon
Frame Material (Standard)	Moisture Resistant Beverage Board
Frame Material (Optional)	Galvanised Steel, Aluminium, Stainless Steel
Special Size Available	Yes
Antimicrobial Available	No
Recommended Final Resistance	250 Pa
Max Operating Temperature	51°C

Initial Resistance vs. Airflow

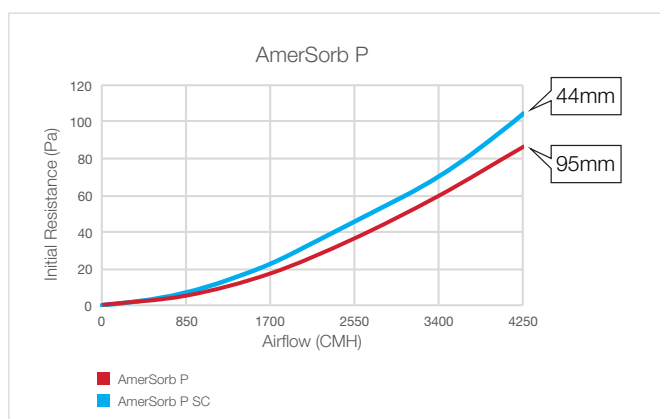

Product Information

Nominal Size Inches (W x H x D)	Actual Size mm (W x H x D)	Rated Airflow (CMH)	Rated Initial Resistance (Pa)	Target Gas
AmerSorb P				
12 x 24 x 1	289 x 594 x 22	1,700	100	VOC
20 x 24 x 1	492 x 594 x 22	2,800		
24 x 24 x 1	594 x 594 x 22	3,400		
12 x 24 x 2	289 x 594 x 44	1,700	90	
20 x 24 x 2	492 x 594 x 44	2,800		
24 x 24 x 2	594 x 594 x 44	3,400		
12 x 24 x 4	289 x 594 x 95	1,700	60	
20 x 24 x 4	492 x 594 x 95	2,800		
24 x 24 x 4	594 x 594 x 95	3,400		
AmerSorb P SC				
12 x 24 x 2	289 x 594 x 44	1,700	70	VOC
24 x 24 x 2	594 x 594 x 44	3,400		